

01-14-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.: 4386-5
Case Name and No.: CHAN 10-2

Inventors: Norman C. Chan of 1818 Eisenhower Drive, Louisville, CO 80027; and
SuJeanne Foster of 1818 Eisenhower Drive, Louisville, CO 80027.

Express Mail Label No.: EL417664328US

Title: METHOD AND APPARATUS FOR PERFORMING ECHO CANCELLATION WITHIN A
COMMUNICATION NETWORK

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Enclosed for filing with the above-identified utility patent application, please find the following:

1. ☒ Specification (Total Pages of Text, including Abstract and Claims: 22)
2. ☒ Drawing(s) (35 USC 113) (Total Sheets: 4) ☐ FORMAL ☒ INFORMAL
3. ☒ Declaration and Power of Attorney (Total Pages: 4) ☒ Signed ☐ Unsigned
4. ☒ Assignment Papers (cover sheet & document(s))
5. ☒ Return Postcard (MPEP 503) (should be specifically itemized)

FEE CALCULATION:

	(COL. 1) NO. FILED			(COL. 2) NO. EXTRA		SMALL ENTITY			LARGE ENTITY	
						RATE	FEE		RATE	FEE
BASIC FEE:							\$345.00	OR		\$690.00
TOTAL CLAIMS:	20	-	20	0		X \$9 =		OR	X \$18 =	
INDEP. CLAIMS:	3	-	3	0		X \$39 =		OR	X \$78 =	
MULTIPLE DEPENDENT CLAIMS						+ \$130 =		OR	+ \$260 =	\$0.00
*IF THE DIFFERENCE IN COL. 2 IS LESS THAN ZERO, ENTER "0" IN COL. 2.						TOTAL:				\$690.00

OTHER INFORMATION:

1. ☒ The Commissioner is hereby authorized to debit any underpayments or credit any overpayment to
Lucent Technologies Deposit Account No. 12-2325.
2. ☒ The Commissioner is hereby authorized to charge all required fees for extensions of time under
\$1.17 to Lucent Technologies Deposit Account No. 12-2325.
3. ☒ Correspondence Address:

John C. Scott
SHERIDAN ROSS P.C.
1560 Broadway, Suite 1200
Denver, Colorado 80202-5141
Telephone: (303) 863-9700
Facsimile: (303) 863-0223

4. ☒ Telephone calls should be made to undersigned at (303) 863-9700.

"EXPRESS MAIL" MAILING LABEL NUMBER: EL417664328US
DATE OF DEPOSIT: 1/12/00

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING
DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS
MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10
ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE
ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C.
20231

TYPED OR PRINTED NAME: Christine Jacquet
Signature: Christine Jacquet

Respectfully Submitted,
SHERIDAN ROSS P.C.

John C. Scott
Registration No. 38,613
Attorney for Applicants

Date: 1/12/00
Lucent Technologies, Inc.
600 Mountain Avenue
P.O. Box 636
Murray Hill, NJ 07974-0636



TECHNICAL FIELD

BACKGROUND OF THE INVENTION

In a telephone switching center, problems arise when relatively large echoes are received from one or more of the outgoing trunks. To address this problem, each of the outgoing trunks in a switching center has traditionally been assigned a dedicated echo cancellation unit to suppress any echoes received from the trunk. However, only a small percentage of the outgoing trunks in a switching center normally experience echo problems during normal system operation. Therefore, more echo cancellation functionality is being provided than is necessary to ensure quality communication in the network.

Therefore, there is a need for a method and apparatus for suppressing harmful echoes in a switching center that does not require dedicated echo cancellation functionality on each outgoing trunk.

SUMMARY OF THE INVENTION

The present invention relates to a system for performing echo cancellation within a switching center of a communication network. The system uses a pool of echo cancellation units that
5 are individually allocated to specific communication connections being supported by the switching center based on need. The system first determines whether intolerable echoes are being returned within a particular communication connection. If so, the system allocates one of the echo cancellation units from the
10 pool to the connection. When the communication connection later ends, the echo cancellation unit is returned to the pool for use by another communication connection. Thus, the number of the echo cancellation units that need to be provided within the switching center to ensure quality communication within the
15 network is significantly reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating a public switched telephone network (PSTN) that can utilize the principles of the
20 present invention;

Fig. 2 is a block diagram illustrating functionality within a central office of a PSTN in accordance with one embodiment of the present invention;

Fig. 3 is a block diagram illustrating functionality within a central office of a PSTN in accordance with another embodiment of the present invention; and

Fig. 4 is a flowchart illustrating a method for allocating echo cancellation units within the switching center of a communication network in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION

10 Fig. 1 is a block diagram illustrating a public switched telephone network (PSTN) 10 that can utilize the principles of the present invention. As illustrated, the PSTN 10 includes a plurality of central switching offices 12, 14, 16, 18 for providing switching services within the PSTN 10. Each of the
15 central offices 12, 14, 16, 18 is coupled to a corresponding plurality of local user devices 20 via a plurality of local loops 22. In addition, each of the central offices 12, 14, 16, 18 is coupled to each of the other central offices 12, 14, 16, 18 in the PSTN 10 via a dedicated trunk 24, 26, 28, 30, 32, 34.
20 For example, with reference to Fig. 1, central office 12 is connected to central office 14 via trunk 24, central office 12 is connected to central office 16 via trunk 26, and so on. It should be appreciated that the PSTN 10 illustrated in Fig. 1 has

been made relatively simple for illustration purposes and that a typical PSTN will generally include a much larger number of central offices and corresponding trunks.

In a preferred embodiment, the user devices 20 are
5 conventional telephone units or private branch exchange (PBX) systems that are used primarily for voice communication. However, other types of user device can also be used in accordance with the present invention, such as computer terminals having modem functionality. The trunks 24, 26, 28,
10 30, 32, 34 are relatively high bandwidth transmission media that can each simultaneously carry multiple independent voice or data channels. Typically, communications over a trunk will be performed digitally (e.g., using pulse code modulation techniques) and the individual channels will be time division
15 multiplexed onto the trunk. However, analog data transmission and alternative multiple access schemes can also be used. If high traffic levels are anticipated between a given pair of central offices, a group of trunks (i.e., a trunk group) will often be provided between the offices.

20 In a typical call setup procedure, a caller associated with one central office (e.g., central office 12) sends a request to that central office (using an associated user device 20) to establish a connection with a remote party associated with

another central office (e.g., central office 18). The first central office 12 then directs the request through a corresponding trunk 28 to the other central office 18. Upon receipt of the request, the other central office 18 signals the
5 called party via an associated user device 20 that a connection has been requested. If the party answers the call, the connection is established and a two-way communication ensues through the corresponding trunk 28. Although not apparent from Fig. 1, connections involving one or more intermediate switching
10 centers between the source and destination central offices are also possible (e.g., for long distance calls).

Occasionally, one or more of the trunks coupled to a particular central office will return echoes when the central office sends a communication signal over the trunk. That is, a
15 portion of the communication signal will be reflected back to the central office from the trunk because there is an impedance mismatch (i.e., a discontinuity) somewhere on or after the line.

For example, with reference to Fig. 1, there may be a discontinuity on trunk 24 that reflects a portion of a
20 communication signal being delivered from central office 12 to central office 14, back to central office 12. The reflected signal might then be erroneously delivered to one or more of the user devices 20 associated with central office 12, thereby

reducing communication quality in the PSTN 10. The discontinuity can be caused by any of a number of different sources, such as an analog hybrid circuit, an analog trunk circuit, a termination to an analog phone, a damaged electrical cable or optical fiber, and others.

Fig. 2 is a block diagram illustrating functionality within a central office 12 that is capable of reducing the harmful effects of echoes within the PSTN 10 in accordance with one embodiment of the present invention. As before, the central office 12 is connected to a plurality of local user devices 20 and a plurality of trunks 24, 26, 28. As illustrated, the central office 12 includes a controller 40 and a pool of echo cancellation units 44. The local user devices 20 and the trunks 24, 26, 28 are each coupled to the controller 40 which, in turn, is coupled to the pool of echo cancellation units 44. The controller 40 is operative for performing most of the typical functions associated with a central office 12. In a preferred embodiment, the controller 40 includes at least one digital processing device for performing some or all of its assigned functions. For example, the controller 40 can include a general purpose microprocessor, a digital signal processor, a reduced instruction set computer, a complex instruction set computer, a field programmable gate array, an application-specific

integrated circuit, and/or other such devices. In addition, the controller 40 may include supplemental, special purpose hardware equipment for use in performing some functions. Among other things, the controller 40 is operative for performing
5 conventional telephone switching services within the central office 12. For example, if a user at one of the local user devices 20 requests a connection to a remote user (e.g., by dialing a telephone number associated with the remote user), the controller 40 will couple the local user device 20 to the
10 appropriate trunk 24, 26, 28 for establishing a communication connection between the local user device 20 and the remote user.

The controller 40 is also capable of coupling one local user device 20 to another local user device 20 for establishing a communication connection therebetween. The controller 40 can
15 perform the switching function in any known manner (e.g., electronically or electro-mechanically).

In accordance with the present invention, the controller 40 is also operative for providing echo cancellation services for communication connections being supported by the central office
20 12. The echo cancellation services are provided on an "as needed" basis, using the pool of echo cancellation units 44. The controller 40 first determines whether intolerable echo energy

is being received from a trunk associated with a particular communication connection. The controller 40 then allocates an echo cancellation unit from the pool of echo cancellation units 44 to the communication connection if intolerable echo energy has been detected. Typically, the act of allocating an echo cancellation unit to a communication connection will comprise routing corresponding communications through the echo cancellation unit. When the communication connection is terminated, the allocated echo cancellation unit is released back to the pool 44.

In a preferred embodiment, the pool of echo cancellation units 44 includes one or more multi-channel hardware units for performing echo cancellation. Such devices are available commercially and are generally well known in the art. For example, one such unit is a 64ms, T1, Echo Canceler Unit sold by Tellabs having model number 2572. Alternatively, a plurality of individual hardware-based echo cancellation devices can be provided. In another approach, the pool of echo cancellation units 44 is implemented using a digital processing device having a limited amount of computational resources available for performing echo cancellation. Thus, the digital processing device is only capable of executing an echo cancellation routine for a limited number of communication connections

simultaneously. Using this approach, an echo cancellation unit is "allocated" to a communication connection by allowing an echo cancellation routine to be executed within the limited resources of the digital processing device for the communication
5 connection. Other types of echo canceler pools can also be used.

In one embodiment of the invention, after a communication connection has been established between a local user device 20 and a remote user device, the controller 40 waits for input from
10 the local user device 20 indicating that signal reflections are being detected at the local user device 20. If such input is received, the controller 40 allocates an echo cancellation unit from the pool 44 to the connection. For example, while communicating with a remote party through a telephone unit, a
15 local user associated with central office 12 may hear signals that he does not believe are originating from the remote party.

In response, the local user can press a predetermined key (e.g., the # key or a dedicated function key) on the telephone unit indicating that undesirable echoes are being audibly
20 perceived. The controller 40 detects the key depression and proceeds to allocate one of the available echo cancellation units within the pool 44 to the communication connection. The

selected echo cancellation unit then services the communication connection for the remainder thereof. When the connection is terminated (e.g., one of the parties hangs up), the echo cancellation unit allocated to the connection is released for
5 use by another communication connection within the central office 12. Thus, an echo cancellation unit will only be allocated to a communication connection when the quality of communication within the connection is below a user tolerance level.

10 In a conventional PSTN, the central office no longer recognizes keypad signals received from the local user devices as commands once a telephone connection has been established. Thus, to implement the above-described approach in a PSTN, the controller 40 must be programmed to detect keypad-return
15 signals from a user device during a communication connection. In another embodiment of the invention, the inventive principles are implemented within a private branch exchange (PBX) server that is capable of detecting the depression of special function keys on the keypad of an extension telephone to determine that
20 echo cancellation services are needed. For example, each extension telephone associated with the server can include a key labeled "Echo Cancellation" that can be pressed by a user when intolerable echoes are audibly perceived. The controller within

the PBX server then allocates echo cancellation resources to the connection in response thereto. In yet another embodiment, the inventive principles are implemented within an integrated services digital network (ISDN) system. As is well known, an
5 ISDN system includes a separate signaling channel that is used to carry commands, among other things, within the system. A user within the ISDN system transmits a signal to the ISDN server, via the signaling channel, indicating that intolerable echoes are being perceived. The ISDN server then allocates the
10 necessary echo cancellation functionality to the connection.

In another approach, the controller 40 assigns one of the echo cancellation units within the pool 44 to a communication connection at the time of call initialization (or slightly thereafter). The controller 40 then monitors the assigned echo
15 cancellation unit to determine whether significant echo cancellation activity is actually occurring. If the echo cancellation unit is not performing significant echo cancellation for the communication connection, the controller 40 will release the echo cancellation unit and return it to the
20 pool 44 for use by another connection. If the echo cancellation unit is performing significant echo cancellation, the controller 40 will allow the echo cancellation unit to continue to service the connection for the duration thereof. An echo cancellation

unit can detect the existence of echoes by examining the energy of a communication signal before and after the cancellation process. In a preferred approach, the controller 40 will only allow an echo cancellation unit to continue to service a particular communication connection if greater than a threshold amount of echo cancellation is being performed. Thus, small echoes that do not normally compromise communication quality will be ignored.

Fig. 3 is a block diagram illustrating another embodiment of central office 12 in accordance with the present invention. In addition to the previously described functionality, the central office 12 of Fig. 3 includes a pool of call classifier units 60. During call initialization (or slightly thereafter), the controller 40 assigns one of the call classifier units from the pool 60 to the communication connection for use in determining the extent of echo generation associated with the connection. If the call classifier detects echo generation above a predetermined threshold level, it signals the controller 40 which assigns an echo cancellation unit to the connection from the pool 44. If the call classifier does not detect the requisite echo levels within a predetermined time interval after assignment, the call classifier is released back to the call classifier pool 60 and an echo cancellation unit is not

allocated to the connection. The threshold echo level used by the call classifier can be specified, for example, as an absolute power level or a power level that is relative to the level of a corresponding transmitted signal. Call
5 classification structures and techniques are generally well known in the art. In a PBX system, call classification functionality is generally provided as an internal feature of the switch.

Typically, the number of trunks 24, 26, 28 associated with
10 a central office 12 will greatly exceed the number of echo cancellation units within the corresponding pool of echo cancellation units 44. The number of echo cancellation units provided within the pool 44 will generally be selected based upon the anticipated maximum number of trunks that will
15 simultaneously have echo generation problems. The appropriate number can be determined based on, for example, historical performance records or predicted trunk defect rates.

In one embodiment, the controller 40 maintains a database identifying which outgoing trunks and/or which outgoing phone
20 numbers have required an echo cancellation unit in the past. The database can then be used to automatically assign an echo cancellation unit to a given communication connection at the time of call initialization when the same routing is

encountered. The database can also be used to identify defective trunks or communication paths that need to be repaired or replaced.

Fig. 4 is a flowchart illustrating a method for allocating
5 echo cancellation units within the switching center of a communication network in one embodiment of the present invention. The method can be utilized, for example, within the central office of a conventional telephony system, within a PBX server unit, or within an ISDN system controller. First, a pool
10 of echo cancellation units is provided within the switching center for use with selected communications connections being supported by the switching center (step 100). A communication connection is then established between a local subscriber and a remote subscriber via a first trunk coupled to the switching
15 center (step 102). Next, it is determined whether intolerable reflections are being received at the switching center from the first trunk (step 104). This determination can be made by the local subscriber or by functionality within the switching center itself (e.g., using a call classifier or an echo cancellation
20 unit). If intolerable reflections are not being detected, the communication connection continues without echo cancellation (steps 106 and 108). When intolerable reflections are detected for the connection, an echo cancellation unit is allocated to

the connection from the pool of echo cancellation units for use during the remainder of the connection (steps 106 and 110). If an echo cancellation unit was used to detect the intolerable reflections, then this unit will normally be the one allocated to the connection. After the communication connection has ended, the allocated echo cancellation unit is released back to the pool for use by another connection (step 112).

Although the present invention has been described in conjunction with its preferred embodiments, it is to be understood that modifications and variations may be resorted to without departing from the spirit and scope of the invention as those skilled in the art readily understand. For example, the inventive principles are not limited to use within conventional telephony networks but can be advantageously implemented in any communication system that utilizes switching centers to provide circuit connections between remote communication entities. Such modifications and variations are considered to be within the purview and scope of the invention and the appended claims.

What is claimed is:

1. A method for performing echo cancellation within a switching center of a communication network, said switching center being coupled to a plurality of local user devices and a plurality of external transmission media, said method comprising
5 the steps of:

providing a pool of echo cancellation units within said switching center;

coupling a first local user device to a first external transmission medium as part of a communication connection
10 between the first local user device and a remote user device;

determining whether intolerable echo energy is being received from said first external transmission medium during said communication connection; and

allocating a first echo cancellation unit from the pool of
15 echo cancellation units to the communication connection when intolerable echo energy is detected in said determining step.

2. The method claimed in claim 1, wherein:
said first external transmission medium includes a trunk.

3. The method claimed in claim 2, wherein:

said first local user device includes a telephone unit connected to said switching center via a local loop.

4. The method claimed in claim 3, wherein:

said step of coupling includes providing a communication path between said telephone unit and said trunk.

5. The method claimed in claim 1, wherein:

said step of determining includes receiving a signal from said first local user device indicating that echoes are being audibly perceived by a user thereof.

6. The method claimed in claim 1, wherein:

said step of determining includes allocating a call classifier to said communication connection and receiving an indication from said call classifier that echoes above a
5 predetermined power level are being received from said first external transmission medium.

7. The method claimed in claim 1, wherein:

said step of determining includes assigning an echo cancellation unit to said communication connection and receiving an indication from said echo cancellation unit that echoes above

5 a predetermined power level are being received from said first external transmission medium; and

said step of allocating includes allowing said echo cancellation unit to continue performing echo cancellation for said communication connection for the duration thereof.

8. The method claimed in claim 1, wherein:

said pool of echo cancellation units includes at least one multi-channel hardware echo cancellation device.

9. The method claimed in claim 1, wherein:

said pool of echo cancellation units includes a programmable digital processing device.

10. The method claimed in claim 1, further comprising the step of:

releasing said first echo cancellation unit back to said pool when said communication connection has ended.

11. A switching center for use within a communication network, comprising:

a plurality of first ports for use in coupling the switching center to a plurality of local user devices;

5 a plurality of second ports for use in coupling the switching center to a plurality of external transmission media, each of said plurality of external transmission media being coupled at an opposite end to another switching center within the communication network;

10 a switch for selectively coupling individual first ports to individual second ports within the switching center for use in establishing communication connections between local user devices and remote user devices in the communication network;

15 a pool of echo cancellation units that are each capable of reducing echoes received by said switching center from an external transmission medium; and

20 an allocation unit for allocating an echo cancellation unit from said pool of echo cancellation units to a communication connection being supported by the switching center in response to detection of intolerable echo energy from an external transmission medium associated with said communication connection.

12. The switching center of claim 11, wherein:

said plurality of external transmission media include a plurality of trunks.

13. The switching center of claim 11, wherein:

said communication network includes a conventional telephony network.

14. The switching center of claim 11, wherein:

said pool of echo cancellation units includes a plurality of individual hardware units.

15. The switching center of claim 11, wherein:

said allocation unit includes at least one call classifier for detecting echoes associated with a communication connection.

16. A switching center for use in a communication network to provide switching services between a plurality of local user devices and a plurality of trunks, comprising:

means for selectively coupling a first local user device in
5 the plurality of local user devices to a first trunk in the plurality of trunks in response to a request for a communication connection between said first local user device and a remote user device;

means for detecting signal echoes being received from said
10 first trunk during said communication connection; and

means for allocating echo cancellation functionality to said communication connection when signal echoes having greater than a predetermined magnitude are detected by said means for detecting.

17. The switching center claimed in claim 16, wherein:

said means for detecting signal echoes includes a call classifier unit.

18. The switching center claimed in claim 16, wherein:

said means for detecting signal echoes includes means for receiving a signal from said first local user device indicating that signal echoes have been audibly perceived by a user of said
5 first local user device.

19. The switching center claimed in claim 16, wherein:

said means for detecting signal echoes includes an echo cancellation unit.

20. The switching center claimed in claim 16, wherein:

said means for allocating includes a pool of echo cancellation units.

ABSTRACT

A switching center for use in a communication network includes a pool of echo cancellation units for use in providing echo cancellation services to users associated with the switching center on an "as needed" basis. A communication connection being supported by the switching center is analyzed to determine whether intolerable reflections are being received from an associated trunk. If such reflections are detected, one of the echo cancellation units in the pool is assigned to the communication connection for use in reducing or eliminating the reflections. When the communication connection terminates, the echo cancellation unit is returned to the pool for subsequent use with another communication connection.

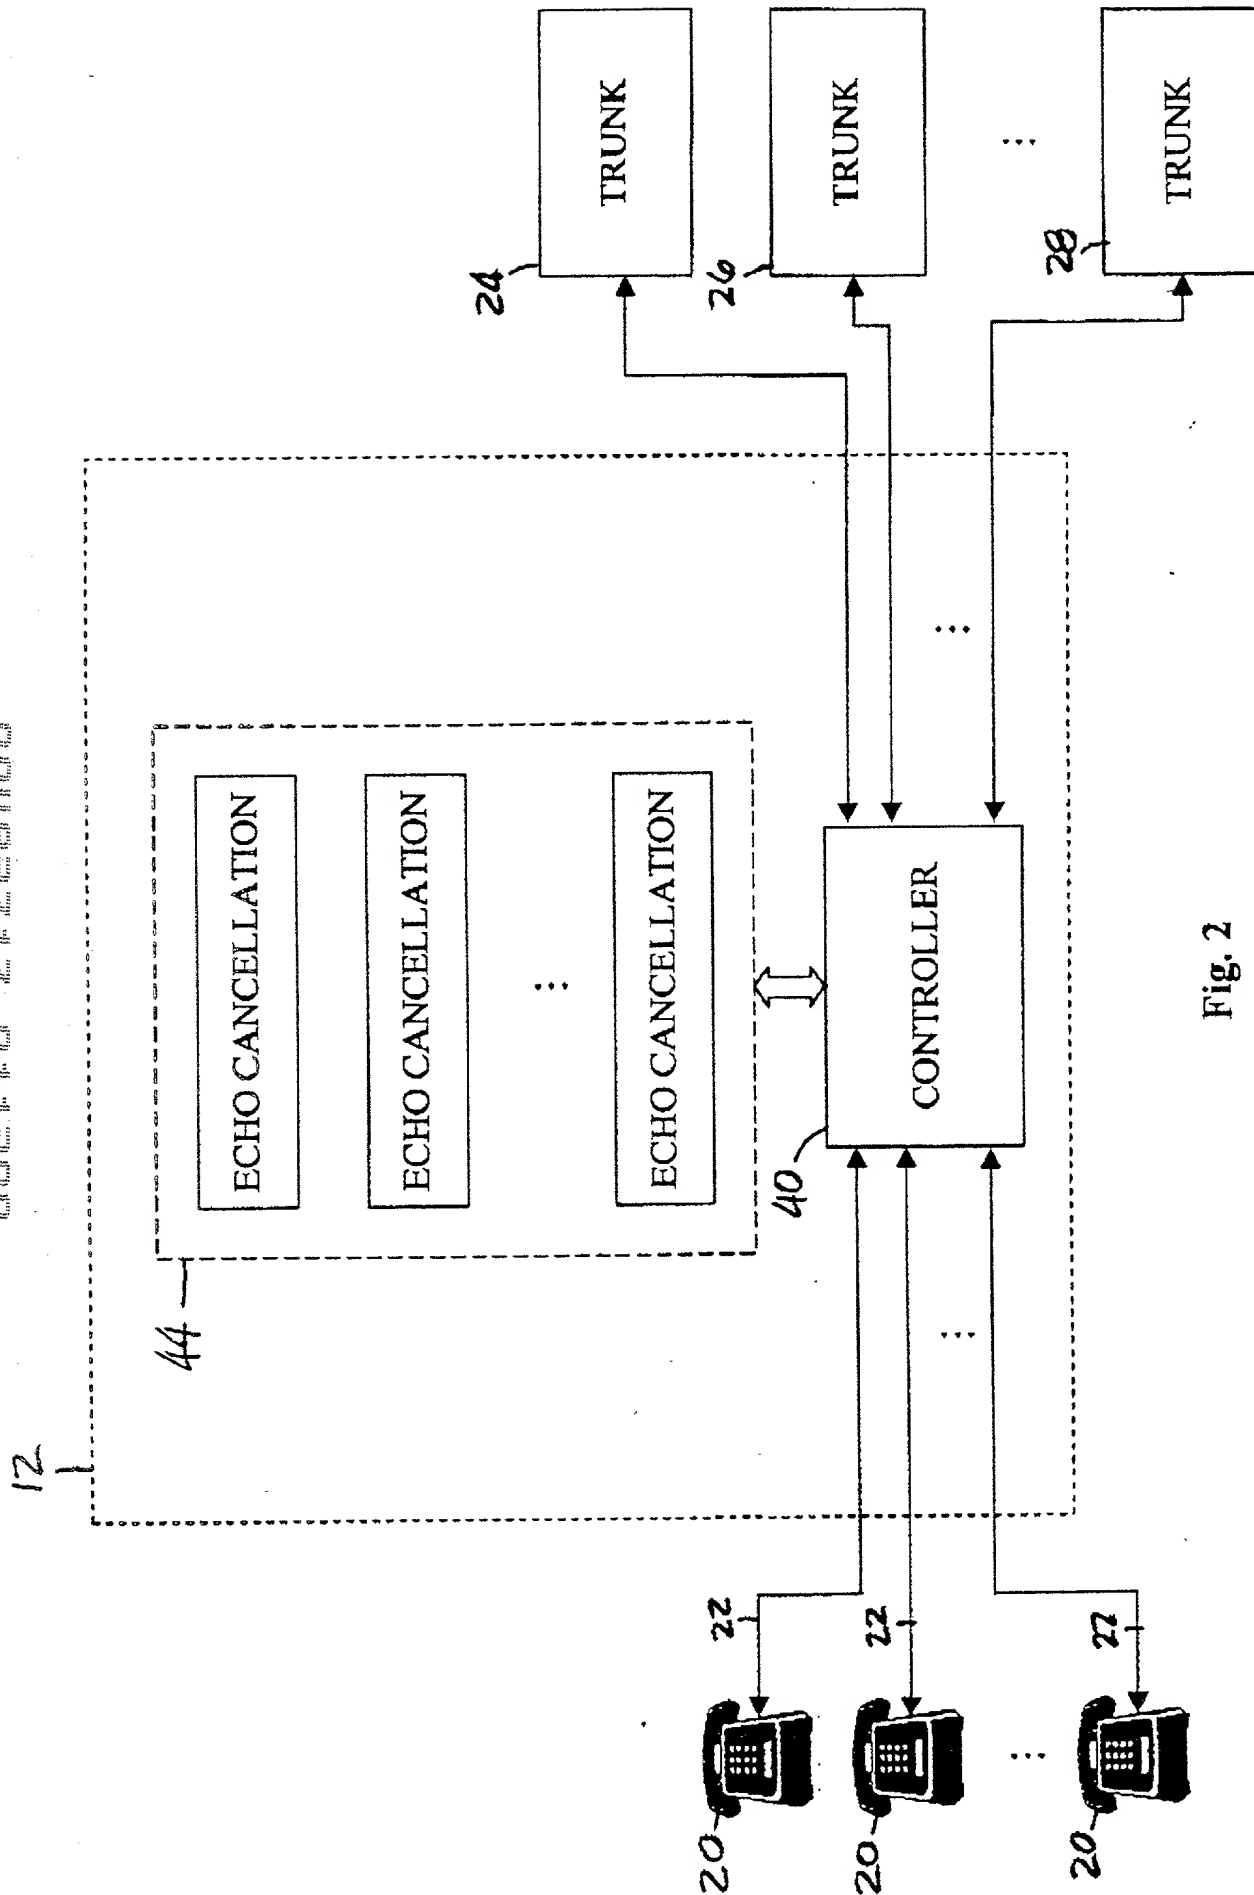


Fig. 2

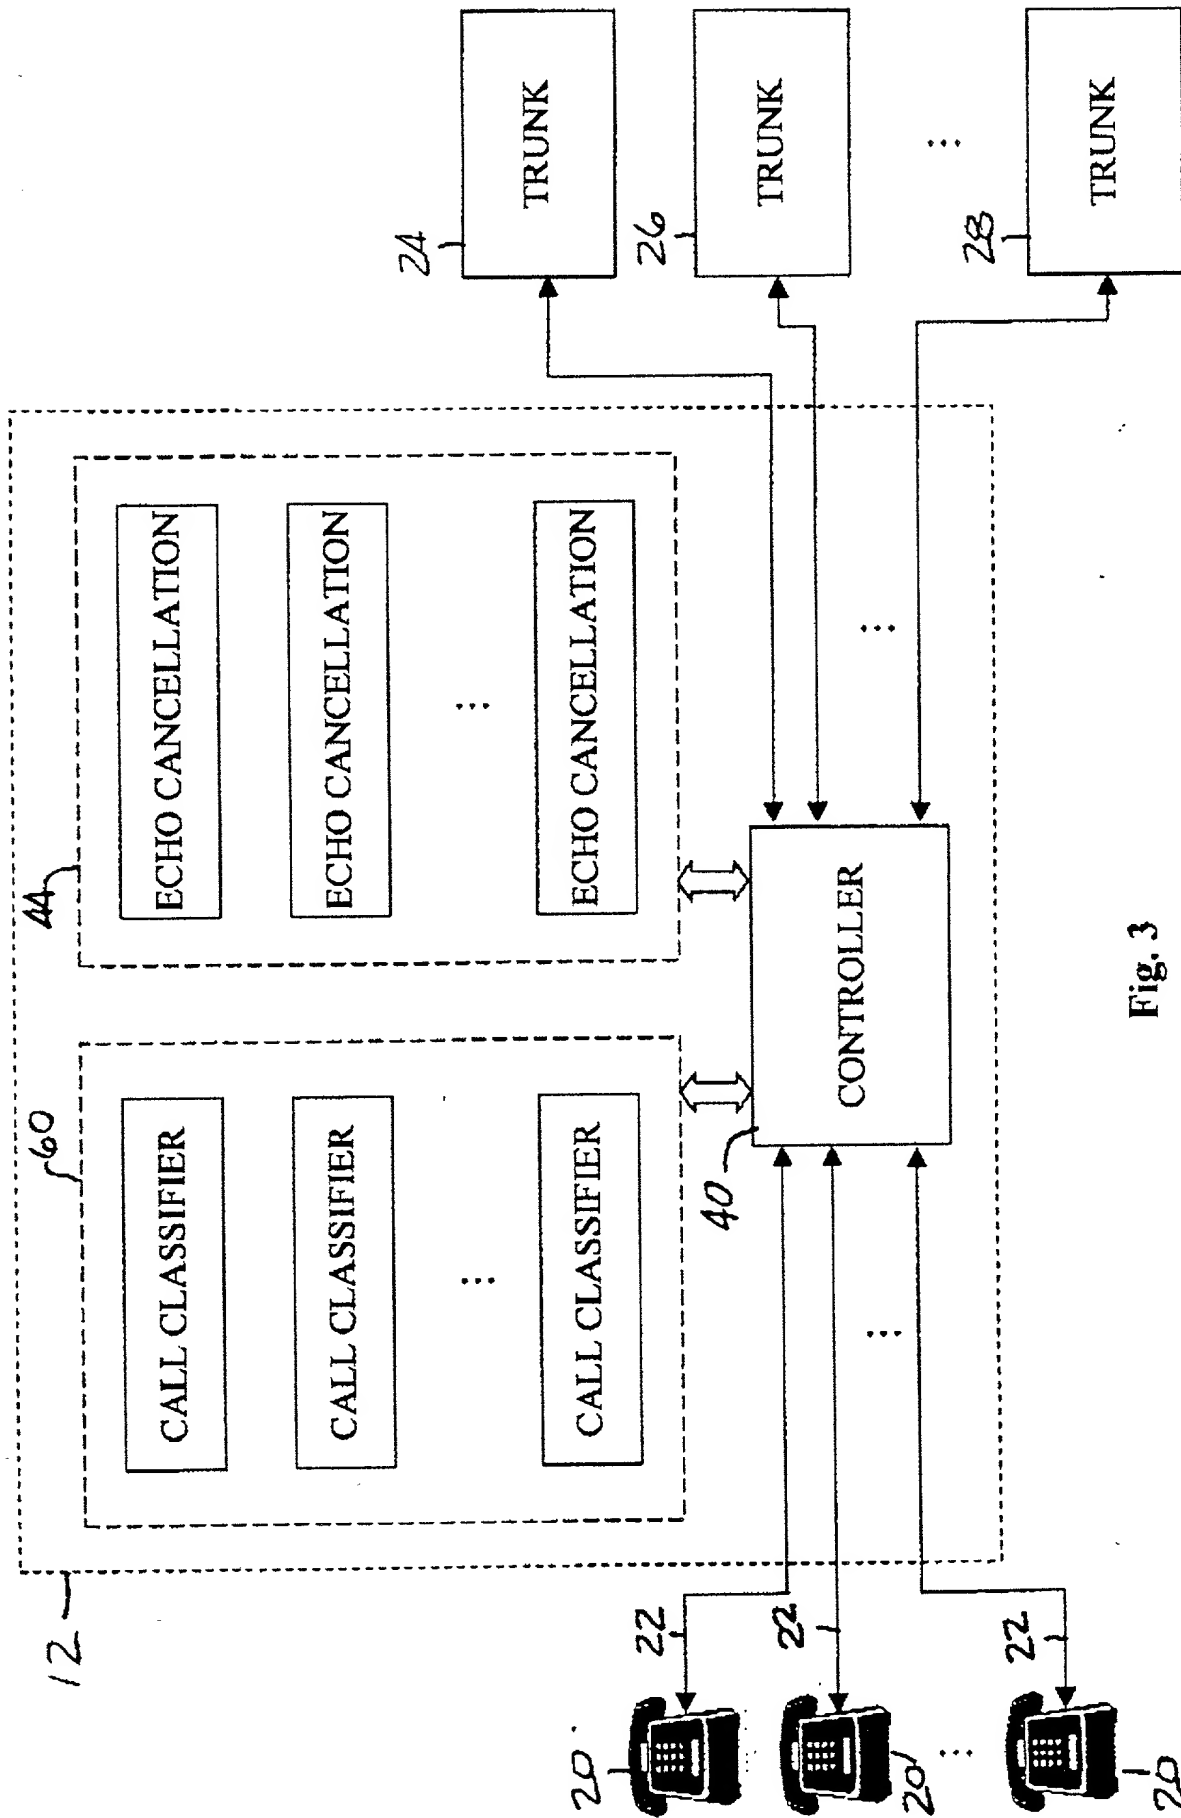


Fig. 3

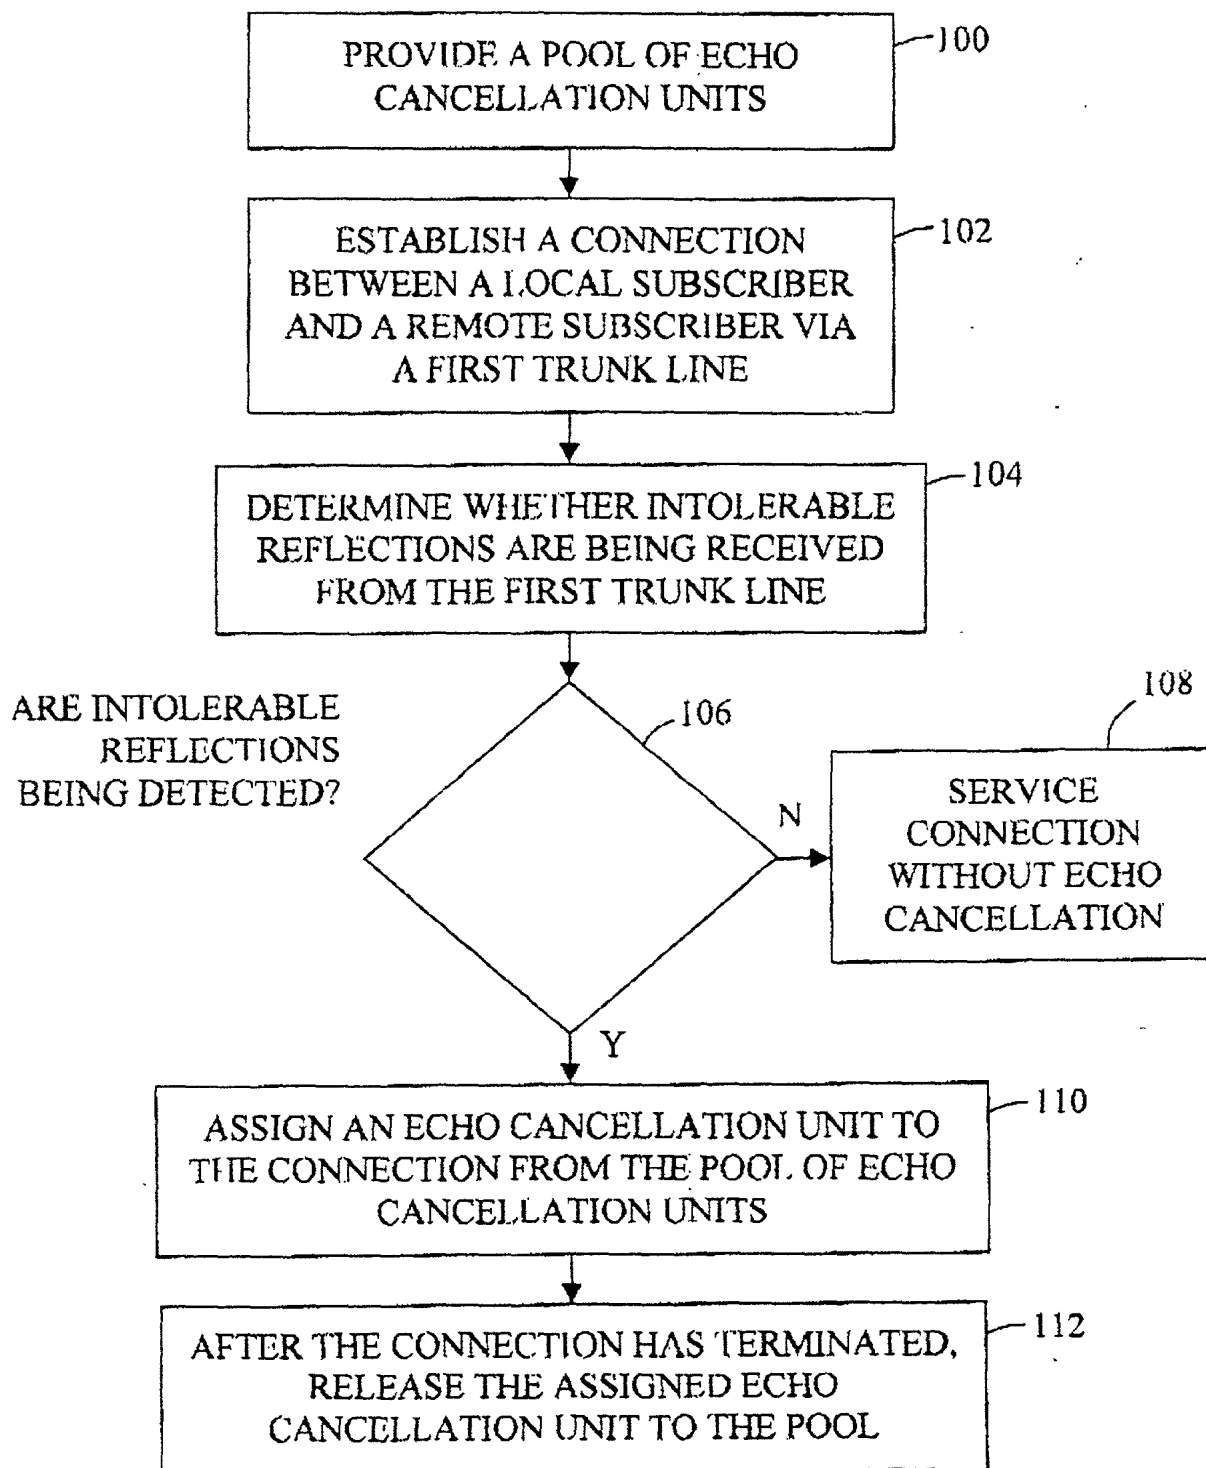


Fig. 4

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

DECLARATION AND POWER OF ATTORNEY

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND APPARATUS FOR PERFORMING ECHO CANCELLATION WITHIN A COMMUNICATION NETWORK** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application (s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United states application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

DECLARATION

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Donald P. Dinella	(Reg. No. 39961)
Guy Eriksen	(Reg. No. 41736)
Martin I. Finston	(Reg. No. 31613)
James H. Fox	(Reg. No. 29379)
William S. Francos	(Reg. No. 38456)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Mony R. Ghose	(Reg. No. 38159)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
John W. Hayes	(Reg. No. 33900)
Michael B. Johannesen	(Reg. No. 35557)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
Christopher N. Malvone	(Reg. No. 34866)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
Geraldine Monteleone	(Reg. No. 40097)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Eugen E. Pacher	(Reg. No. 29964)
Jack R. Penrod	(Reg. No. 31864)
Daniel J. Piotrowski	(Reg. No. 42079)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Patricia A. Verlangieri	(Reg. No. 42201)

OFFICE OF THE CLERK

Figure 1 displays 12 histograms showing the distribution of the number of non-zero elements in the vector x_k for $k = 0, 1, \dots, 11$. The x-axis for all plots is 'Number of non-zero elements' ranging from 0 to 10. The y-axis is 'Frequency' ranging from 0 to 10. The distributions are: $k=0$ (peak at 0), $k=1$ (peak at 0), $k=2$ (peak at 0), $k=3$ (peak at 0), $k=4$ (peak at 0), $k=5$ (peak at 0), $k=6$ (peak at 0), $k=7$ (peak at 0), $k=8$ (peak at 0), $k=9$ (peak at 0), $k=10$ (peak at 0), $k=11$ (peak at 0).

John P. Veschi	(Reg. No. 29355)
David Volejnicek	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Jeffrey M. Weinick	(Reg. No. 36304)
Eli Weiss	(Reg. No. 17765)

I hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Full name of sole inventor (or 1st joint inventor): Norman C. Chan

Inventor's signature Norman Chan Date 1/10/2000

Residence: Louisville, Colorado

Citizenship: USA

Post Office Address: 1818 Eisenhower Drive
Louisville, CO 80027

Full name of 2nd joint inventor: SuJeanne Foster

Inventor's signature Sejanne Foster Date Jan 10, 2000

Residence: Louisville, Colorado

Citizenship: USA

Post Office Address: 1818 Eisenhower Drive
Louisville, CO 80027

ATTACHMENT A

David F. Zinger	(Reg. No. 29127)
Craig C. Groseth	(Reg. No. 31713)
Michael L. Tompkins	(Reg. No. 30980)
Sabrina C. Stavish	(Reg. No. 33374)
Todd P. Blakely	(Reg. No. 31328)
Lewis D. Hansen	(Reg. No. 35536)
Joseph E. Kovarik	(Reg. No. 33005)
Gary J. Connell	(Reg. No. 32020)
Wannell M. Crook	(Reg. No. 31071)
Douglas W. Swartz	(Reg. No. 37739)
Bruce A. Kugler	(Reg. No. 38942)
Robert R. Brunelli	(Reg. No. 39617)
Tejpal S. Hansra	(Reg. No. 38172)
Dana L. Hartje	(Reg. No. 40638)
Don D. Cha	(Reg. No. 40945)
Angela Dallas-Pedretti	(Reg. No. 42460)
Benjamin B. Lieb	(Reg. No. 42801)
Bradley M. Knepper	(Reg. No. 44189)
Theresa A. Brown	(Reg. No. 32547)
John C. Scott	(Reg. No. 38613)
Miriam R. Drickman	(Reg. No. 42499)

Telephone calls should be made to Sheridan Ross P.C. at:

Phone No.: (303) 863-9700
Fax No.: (303) 863-0223

All written communications are to be addressed to:

John C. Scott
Sheridan Ross P.C.
Suite 1200
1560 Broadway
Denver, CO 80202-5141